


BRTYZGT Series

两轴伺服给汤机 Two Axis Servo Rod Ladler

产品特点 Product Features

- 采用全新的驱控一体控制系统，信号线少，维护简单
- 搭配轻巧移动式手持操作器，参数和功能设定一目了然，操作简便快捷
- 整体结构采用伺服马达加RV减速机驱动，运行更平稳，精度更高，效率更高
- It adopts a new integrated control system with fewer signal lines and simple maintenance.
- With portable hand type operating device, the parameters and function settings are clear at a glance and the operation is simple and quick.
- The whole structure is driven by servo motor and RV reducer, which makes the operation more stable, more accurate and more efficient.

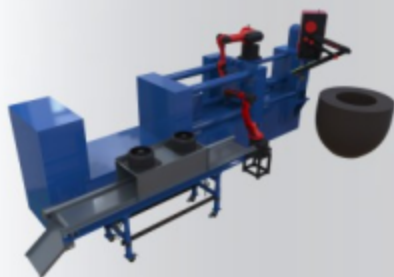

主要规格 Main Specification

项目Project	BRTYZGT02S2B
适应压铸机 Recommended die casting machine	160T-400T
手臂驱动马达 Manipulator Motor Drive	0.75KW
汤勺驱动马达 Tablespoon Motor Drive	0.75KW
RV减速机 RV reducer	40E 1:153
RV减速机 RV reducer	20E 1:121
最大给汤量 Max. Loading	4.5KG
可配汤勺规格 Recommended tablespoon type	0.8KG-4.5KG
可取汤深度 Tablespoon max.	350mm
熔炉可配高度 Recommended height for smelter	≤1100mm
熔炉臂可配厚度 Recommended thickness of smelter arm	≤450mm
运行周期 Cycle Time	待定 (4S以内, 手臂待机位开始下降到注入完汤液)
主控电源 Main control power	AC单相220V/50HZ
电源容量 Power Capacity	1.67KVA
整机尺寸 Dimensions	长*宽*高 (1140*680*1400mm)