

# B RTP Series

## 斜臂式机械手 Swing-arm Robot

### 产品特点 Product Features

B RTP系列适用于30T-300T的各型卧式射出成型机的成品及水口取出。上下手臂有单载式B RTP06ISS0PC,采用气压或者伺服驱动。上下、引拔、旋出、旋入均采用气压驱动,速度快、高效率、经济实惠型机械手臂。安装机械手可增加产能(10-30%)、降低产品的不良率、保障操作人员的安全性、减少人工、精准控制生产量、减少浪费。


B RTP series Swing-arm robot is applicable to all types of horizontal injection machine of 30T-300T for take-out products and sprues. It has ranges of model B RTP06ISS0PC and B RTW06ISS0P0, with two types of arms, single stage and telescopic type. The single function is to clamp products, and the full function is to take-out products and sprues. Swing arm robot with one axis servo ranges of model B RTP06ISS0PC, B RTP07ISS1P0, B RTW06ISS0P0. After installed this robot, the productivity will be increased 10-30%, reduce defective rate, ensure safety of operators, reduce manpower and accurately control the output to reduce waste.



### 主要规格 Main Specification

机型 Model	电源容量(KVA) Power Source	适用成型机(ton) Recommended: M.M	上下行程(mm) Vertical Stroke	引拔行程(mm) Crosswise Stroke	放出角度(度) Swing Angle(degree)	取出时间(sec) Dry Take Out Time	最大荷重(KG) Max Loading	全循环时间(sec) Dry Cycle Time	空气消耗量 (Nl/cycle) Air Consumption	净重(KG) Net Weight
B RTP06ISS0PC	0.1	30T-150T	650	120	30-90	1.3	2	5.5	3	36

机型表示: I: 单载式 S: 单臂机械手(成品臂) S0: 气缸驱动 Denote: I: Single stage S: Product arm S0: Driven by cylinder

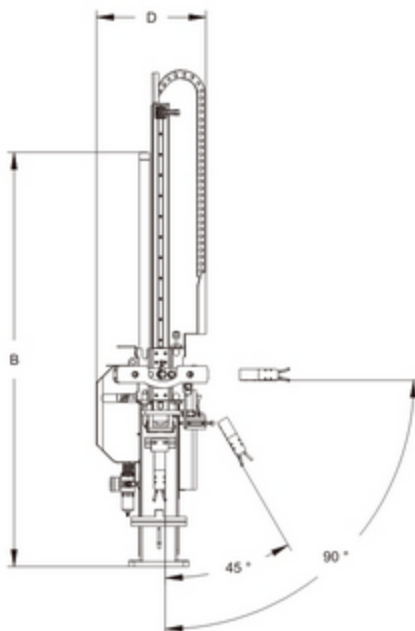

Model	A	B	C	D	E	F	G	H	I	J	K
B RTP06ISS0PC	1330	1210	530	310	840	/	210	/	50	/	440

因改良等原因,规格及外观有所变更时,不再另行通知,敬请谅解。

Without further notice if specification and exterior have been changed because of improvement.Thanks for your understanding.